




Features:

- On board low noise 3.3 V voltage regulator with noise 2 nV/ $\sqrt{\text{Hz}}$
- **USB, I2C** (SDA, SCL), **SPI** and two **UART** (Tx, Rx) interfaces
- **LIS3MDL** magnetometer
- **Mini USB** connector
- 12 pin JST SH connector and 4 pin JST SH for LIS3MDL magnetometer
- MultiBand GPS L1, GPS L2 and GPS L5 band, GLONASS, Galileo and BeiDou Operation antenna
- u-center Evaluation Software
- Extensive visualization and evaluation features
- Time pulse LED, GEO LED, RTK LED
- Backup supercapacitor
- EMI protection
- Dimensions: **70x70 mm**
- Weight: **79.5 gr.**

Reference: ELT0146

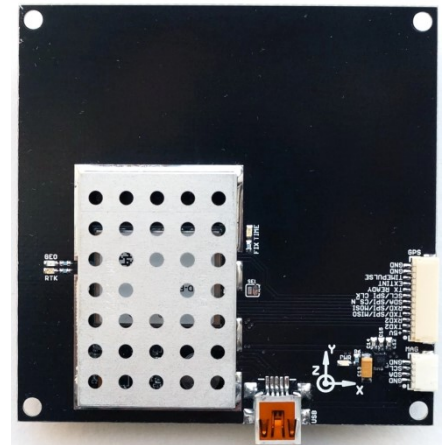

GNSS FEATURES

Receiver type	184-channel u-blox F9 engine Beidou, Galileo, GLONASS, GPS/QZSS, NavIC
GNSS platform	Concurrent GNSS
GNSS bands	L1C/A, L1OF, E1-B/C, B1I, B1C, L5, E5a, B2a, SPS-L5
Oscillators	TCXO

PERFORMANCE

Accuracy of time pulse signal	Absolute timing mode	5 ns
	Differential timing mode	2.5 ns
Frequency of time pulse	0.25 Hz to 25 MHz configurable	
Time pulse jitter	± 4 ns	
Time mark resolution	8 ns	
Velocity accuracy	0.05 m/s	
Dynamic heading accuracy	0.3 deg	

Acquisition	Cold start	Hot start	Aided start	Navigation update rate
GPS+GLO+GAL+BDS	24 s	2 s	2 s	8 Hz
GPS+BDS+GAL	25 s	2 s	2 s	10 Hz
GPS+GAL	29 s	2 s	2 s	15 Hz
GPS+GLO	26 s	2 s	2 s	15 Hz
GPS+BDS	28 s	2 s	2 s	12 Hz
GPS	29 s	2 s	2 s	20 Hz

Horizontal position accuracy 1.5 m CEP

Sensitivity:

Tracking and Navigation	-167 dBm
Reacquisition	-160 dBm
Cold start	-148 dBm
Hot start	-157 dBm

OTHER FEATURES

Anti-jamming	Active CW detection and removal Dual band onboard pass filter
Anti-spoofing	Advanced anti-spoofing algorithms
Security	Secure boot Secure firmware update
Memory	Flash
RAW data support	Carrier phase, code phase and pseudo-range, Doppler on all signals
Operating temperature	0 °C to +50 °C
Supply voltage	4.5 V to 5.5 V
Supply current	<130 mA